



GRABBER

GT PLUS ENJOY RELIABLE PERFORMANCE FOR YOUR SUV



High-tensile steel belts provide exceptional penetration resistance, uniform footprint pressure and stability at high speeds.



The VAI (Visual Alignment Indicator) contributes to longer tread life for the tyres.



The RTM (Replacement Tire Monitor) provides the vehicle owner with added safety by indicating the need to replace the tyres.



The new wear-optimised pattern of the tyre leads to even pressure distribution in the contact area with the road so the tyre provides a longer lasting performance, mile after mile.



ANYWHERE IS POSSIBLE

General Tire's new SUV on-road summer line is designed to deliver a reliable performance with SUV dedicated robustness, outstanding wet grip and high mileage.



GENERAL TIRE

SINCE 1915.
GENERAL TIRE. A BRAND OF CONTINENTAL.

WWW.GENERALTIRE.EU




GRABBER GT PLUS

ENJOY RELIABLE PERFORMANCE FOR YOUR SUV

PERFORMANCE COMPARISON

(based on internal tests)

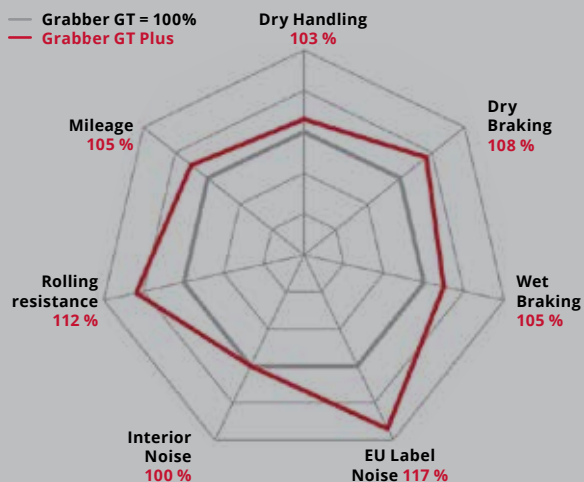

High-tensile steel belts provide exceptional penetration resistance, uniform footprint pressure and stability at high speeds.



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)	Fuel efficiency	Wet grip	Outside noise / in decibels
			width (mm)	outer diameter (mm)				
17"	215/60 R 17 96H FR	6.0 - 7.5	230	700	2105	C	A	71/2
	215/65 R 17 99V FR	6.0 - 7.5	230	724	2172	C	A	71/2
	225/60 R 17 99V FR	6.0 - 8.0	237	712	2141	C	A	71/2
	225/65 R 17 106V XL FR	6.0 - 8.0	237	736	2208			
	235/55 R 17 99H FR	6.5 - 8.5	255	700	2105	C	A	71/2
	235/55 R 17 99V FR	6.5 - 8.5	255	700	2105	C	A	71/2
	235/65 R 17 108V XL FR	6.5 - 8.5	250	750	2251	C	A	72/2
18"	215/55 R 18 99V XL FR	6.0 - 7.5	235	703	2114	C	A	72/2
	225/55 R 18 98V FR	6.0 - 8.0	242	715	2150	C	A	71/2
	235/50 R 18 97V FR	6.5 - 8.5	255	703	2114	C	A	71/2
	235/50 R 18 101Y XL FR	6.5 - 8.6	255	703	2114	C	A	72/2
	235/55 R 18 100H FR	6.5 - 8.5	255	725	2181	C	A	71/2
	235/55 R 18 100V FR	6.5 - 8.6	255	725	2181	C	A	71/2
	235/60 R 18 103V FR	6.5 - 8.5	250	751	2254	C	A	71/2
	235/60 R 18 107W XL FR	6.5 - 8.6	250	751	2254	C	A	72/2
19"	235/55 R 19 105V XL FR	6.5 - 8.5	255	751	2260	C	A	72/2
	235/55 R 19 105Y XL FR	6.5 - 8.6	255	751	2260	C	A	72/2
	255/50 R 19 107Y XL FR	7.0 - 9.0	276	749	2254	C	A	73/2
	255/55 R 19 111V XL FR	7.0 - 9.0	276	775	2327	C	A	73/2
20"	275/40 R 20 106Y XL FR	9.0 - 11.0	289	736	2220	C	A	73/2
	275/45 R 20 110Y XL FR	8.5 - 10.5	284	766	2306	C	A	73/2
	315/35 R 20 110Y XL FR	10.5 - 12.5	333	736	2220	C	A	75/2
	265/45 R 20 108Y XL FR	8.5 - 10.0	277	756	2275	C	A	73/2
	255/50 R 20 109Y XL FR	7.0 - 9.0	276	774	2330	C	A	73/2
	255/45 R 20 105Y XL FR	8.0 - 9.5	265	748	2251	C	A	73/2
	245/45 R 20 103Y XL FR	7.5 - 9.0	253	736	2220	C	A	72/2
21"	255/40 R 21 102Y XL FR	8.5 - 10.0	270	745	2248			
	265/40 R 21 105Y XL FR	9.0 - 10.5	282	753	2272	C	A	73/2
	295/35 R 21 107Y XL FR	10.0 - 11.5	313	747	2254	C	A	75/2
22"	275/40 R 22 108Y XL FR	9.0 - 11.0	289	787	2376	C	A	73/2

¹⁾ All sizes with rim protection (FR)

